

CM GEARMOTORS

DC Permanent Magnet Planetary Gearmotors



general design specification

torque rating: Up to 600 oz. in. maximum torque

weight: 3.4 to 4.0 ounces depending on ratio

gears: Planetary gearing system. All gears are heat treated for consistently reliable performance and long life

shaft: Precision-ground, No. 416 nitrided stainless steel.
Options: length, smaller diameter, flats, pinions, gears, holes (through or tapped), threaded ends and tapers. Type of steel used may change depending upon variation selected

backlash: Varies with reduction but average unit will have less than 3°

gearmotor inertia: 2.5×10^{-5} oz. in. sec.²

bearings: Double-shielded, life-lubricated ball bearings for -55°C to +85°C operation.

cables/leads: 12" leads #26 AWG per MIL-W-16878/4

mounting flange: Aluminum


marking: Per MIL-STD-130

typical no load torque: 0.30 oz.in.

winding temperature rise: 24°C per watt

maximum allowable winding temperature: 180°C

Dimensions

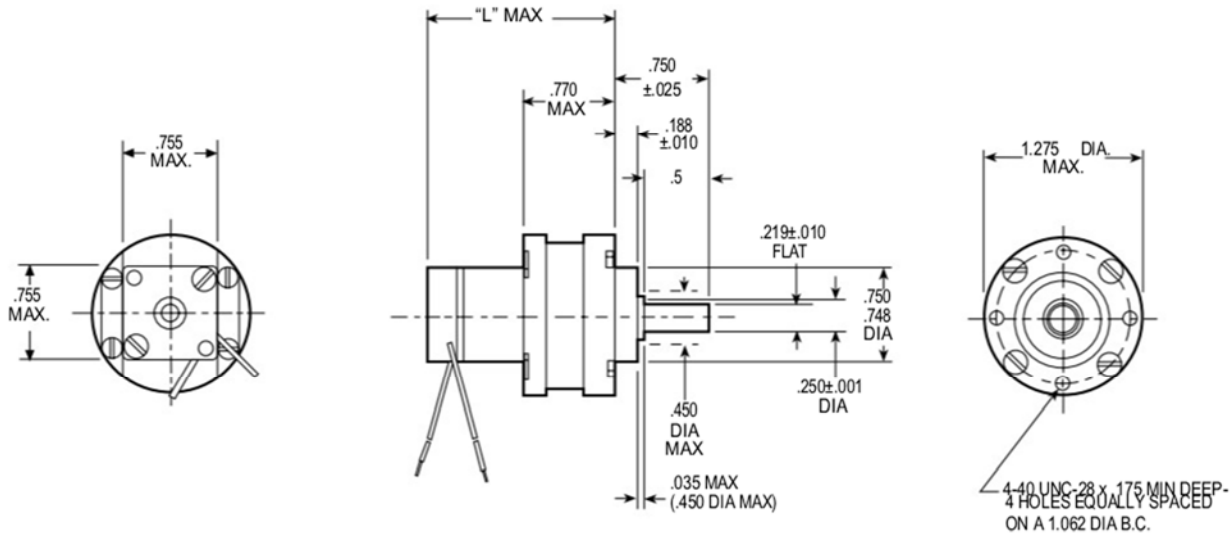

www.grp6.com Call 800-433-3434 x110 OR 978-752-2255 USA

A-1930

Standard Part Numbers and Data

| SPEED REDUCTION RATIO | MAXIMUM CONTINUOUS TORQUE (oz. in.) | TORQUE MULTIPLIER RATIO | L MAX (in.) | STANDARD PART NUMBER PREFIX* |
|-----------------------|-------------------------------------|-------------------------|-------------|------------------------------|
| 18.78:1 | 10.4 | 13 | 1.373 | 477A100 |
| 27.94:1 | 15.2 | 19 | 1.373 | 477A101 |
| 81.37:1 | 37.6 | 47 | 1.506 | 477A102 |
| 121.10:1 | 56.8 | 71 | 1.506 | 477A103 |
| 147.70:1 | 68.8 | 86 | 1.506 | 477A104 |
| 352.60:1 | 138.4 | 173 | 1.639 | 477A105 |
| 524.60:1 | 206.4 | 258 | 1.639 | 477A106 |
| 639.90:1 | 252.0 | 315 | 1.639 | 477A107 |
| 780.60:1 | 307.0 | 384 | 1.639 | 477A108 |

.250" dia. shaft units limited to 600 oz.in. maximum torque.

Max rated torque of motor selected x torque multiplier ratio must not exceed maximum continuous torque

Gearbox Efficiency = Torque Multiplier Ratio divided by Speed Reduction Ratio x 100

*When You Order

Each of the basic motor armature windings (bottom chart) can be used with any of the gear ratios listed above. To order, state the gear train standard part number prefix, plus a motor armature winding dash number. EXAMPLE: 477A100-1 is an 18.78:1 gearmotor with a "-1" armature winding, 6 volts, 4,300 rpm, .8 oz. in. torque, etc.

Basic Motor Data

| VOLTAGE (VDC) | ±15% SPEED no load (rpm) | TORQUE | | CURRENT | | | CONSTANTS | | ARMATURE WINDING DASH NUMBER* |
|---------------|--------------------------|---------------------|-------------------------|------------------------|---------------------------|----------------------|------------------------------|----------|-------------------------------|
| | | max rated (oz. in.) | nominal stall (oz. in.) | nominal no load (amps) | nominal rated load (amps) | nominal stall (amps) | K _T (oz. in./amp) | R (ohms) | |
| 6 | 4,300 | .8 | 1.7 | .19 | .69 | 1.26 | 1.6 | 4.6 | -1 |
| 12 | 4,400 | .8 | 1.7 | .09 | .35 | .66 | 3.17 | 18.0 | -2 |
| 24 | 4,500 | .8 | 1.7 | .05 | .18 | .33 | 6.15 | 72.7 | -3 |

No load current in this chart applies to the gearmotor